

AUTOMATIC GRILL SHUT-OFF 3-HOUR TIMER INSTRUCTIONS



Model # 3090


**Rated up to 100,000 BTUs /
Max temperature 125°F**

Fit the Automatic Grill Shut-Off Timer in the gas supply line before the grill.

Important: Ensure you connect the gas supply to the side marked "IN" on the timer (see photo). It MUST NOT be fitted within 18" of the grill, or it will overheat, causing damage to the timer and may result in a leak.

Use pipe joint compound on male fittings attached to the timer.

To use, simply set the dial (turn clockwise) to the desired time to shut off. The dial is marked in 3 one hour increments (any position in between is an estimate of that hour). The timer dial will auto rotate (counter-clockwise) and will shut off the gas supply when the dial reaches OFF (i.e. the time is completed).

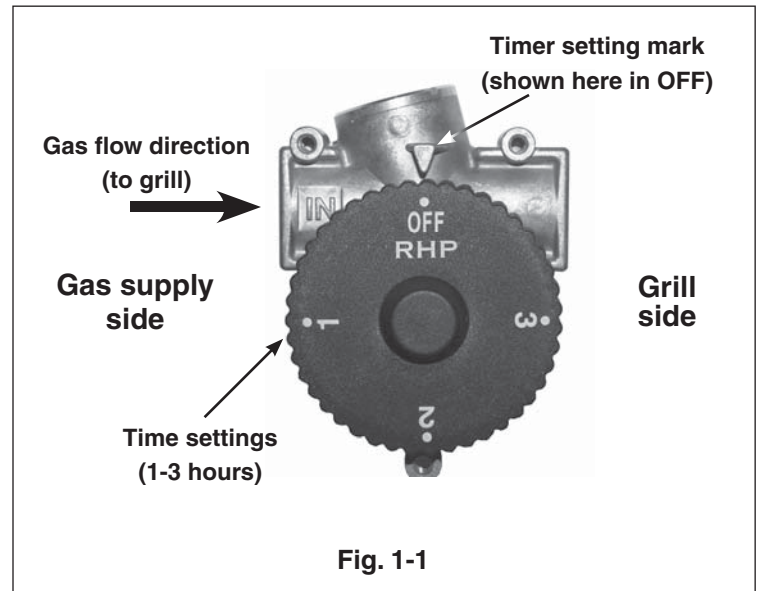

ROBERT H. PETERSON CO. • 14724 East Proctor Avenue • City of Industry, CA 91746

AUTOMATIC GRILL SHUT-OFF 3-HOUR TIMER INSTRUCTIONS



Model # 3090


**Rated up to 100,000 BTUs /
Max temperature 125°F**

Fit the Automatic Grill Shut-Off Timer in the gas supply line before the grill.

Important: Ensure you connect the gas supply to the side marked "IN" on the timer (see photo). It MUST NOT be fitted within 18" of the grill, or it will overheat, causing damage to the timer and may result in a leak.

Use pipe joint compound on male fittings attached to the timer.

To use, simply set the dial (turn clockwise) to the desired time to shut off. The dial is marked in 3 one hour increments (any position in between is an estimate of that hour). The timer dial will auto rotate (counter-clockwise) and will shut off the gas supply when the dial reaches OFF (i.e. the time is completed).

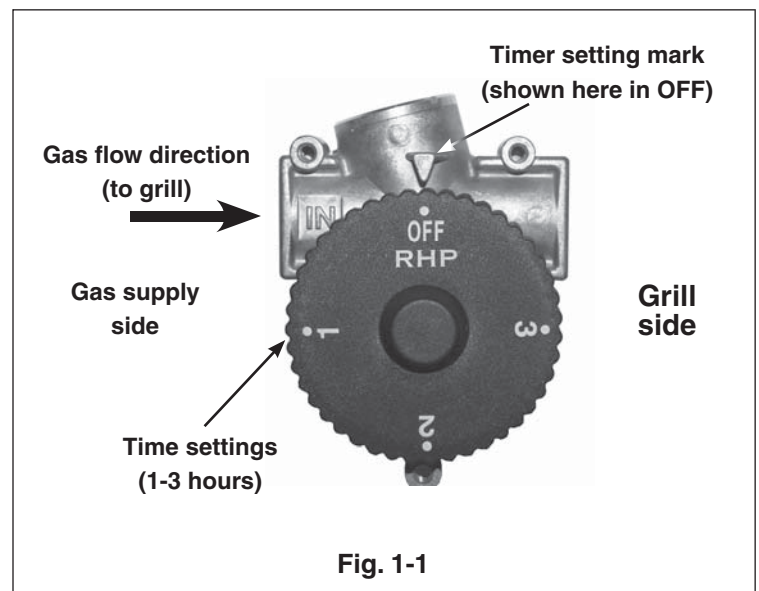

ROBERT H. PETERSON CO. • 14724 East Proctor Avenue • City of Industry, CA 91746