









STANDARD FEATURES

- · Crystal black glass surround
- Realistic LED flame technology
- Full function remote control
- Side mounted manual control
- Multi Color backlight mood setting
- Adjustable Flame Intensity (5 levels)
- Flame operates with or without heat
- LED Digital Readout Control Panel
- 1500 Watt / 5000 BTU Heater
- Built-in thermostat (50° 90° F)
- Sleek wall mount design Only 5" overall depth
- Easy "do it yourself" installation
- Customizable ember bed & flame color

UPGRADES

Glacier Crystal Glass



Blue Flame w/ Glacier Crystals - Blue Flame Included





Just hang and plug in!

AMBIANCE LINEAR 2 ELECTRIC FIREPLACE

The new Ambiance Linear wall mount electric fireplace introduces the latest technology and realism for a stunning addition in the home. This series comes in three convenient sizes starting at 43" up to an impressive 95" for a perfect fit in any room. This sleek, contemporary design paired with lifelike dancing flames offer an easy and economical way to bring a room to life with a effortless do it yourself installation. Simply hang on any wall and plug in for year round enjoyment and warmth. Whether you are looking to add a little heat in the bedroom or make a statement in the living room, this fully featured electric fireplace will satisfy your desire.



3 DIFFERENT SIZES







7 LED BACKLIGHT COLORS



Pacific Backlight



Caribbean Backlight



Indigo Backlight



Ruby Backlight



Mist Backlight



Emerald Backlight



Lime Backlight


LED DIGITAL READOUT



REMOTE CONTROL



MODEL #	VIEWING AREA	FIREBOX DIMENSIONS	OVERALL DIMENSIONS
AL-43-BG2	26 7/8"L x 10"H	28"L x 5"W x 19 3/4"H	42 5/8"L x 5 1/2"W x 25 5/8"H
AL-58-BG2	37" L x 10"H	38"L x 5"W x 19 3/4" H	58 1/3"L x 5 1/2"W x 26 3/8"H
AL-95-BG2	77 1/2" x 10"H	79 1/2"L x 5"W x 19 3/4"H	94 3/8"L x 5 1/2"W x 25 5/8"H

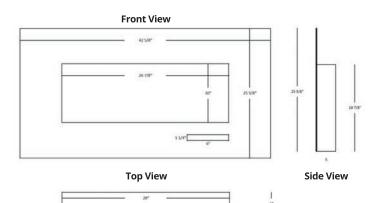

TECHNICAL SPECIFICATIONS		
VOLTS	AC 120V / 60Hz	
AMPS	13 MAX	
WATTS	1530 - 1570	
BTU's	2,500 (LOW) 5,000 (HIGH)	
CIRCUIT	DEDICATED 15 AMP	
TERMINATION	PLUG-IN ONLY	
LAMPS	LED	

Model Shown: AL-43-BG2