


Step 1


Attach seat support to seat assembly using (2) 3" chair screws
Attach back assembly to seat assembly

Lay the seat assembly on its side. Attach sideframe using (3) 3" chair screws


Model: CLC23

- \_(1) Seat assembly
- (1) Back assembly
- \_(2) Sideframes
- \_(1) Top back rail \_(1) Seat support
- \_(1) Seat support \_(1) Seat cushion
- \_\_(1) Back cushion
- (1) Hardware pack

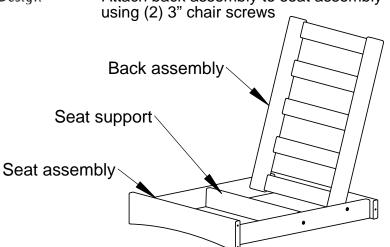








Step 4

Step 2

 Attach top back rail to sideframes using (2) 3" chair screws

- Insert seat and back cushions



Qty. Description

12 A - .27 X 3 SOCKET WAFER A