


# DECORATIVE FYREBACK (STAINLESS STEEL) FBS(B,G,P)-(18,24,30,36) FBC(B,G,P)-(18, 24,30,36)


**INSTALLER:** Leave these instructions with consumer.  
**CONSUMER:** Retain for future reference.

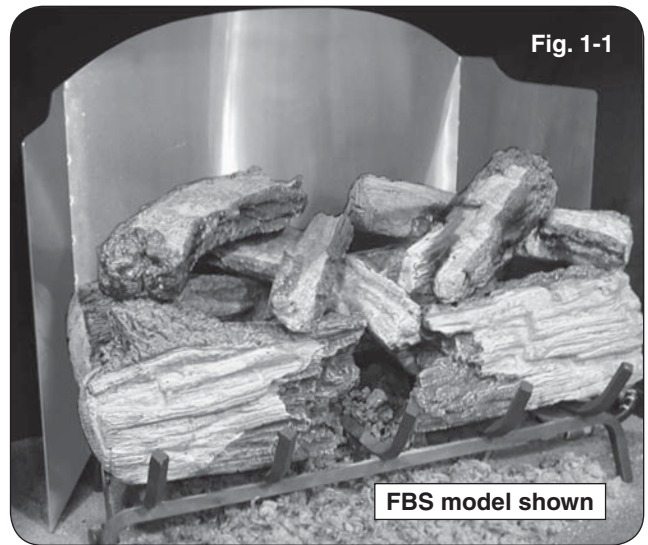

Dimension Table				
	A*	B	C	D
18" models	16"	16.5"	11"	14"
24" models	16"	21.5"	12"	14"
30" models	16"	26.5"	13"	14"
36" models	16"	31.5"	14"	14"

\* Add 1" to A dimension for FBS models

Table 1

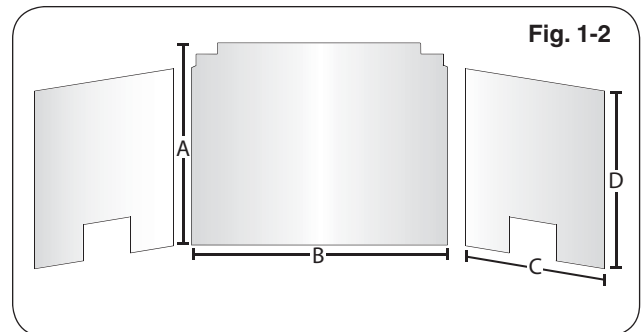


Follow these instructions to set up and install the new decorative fireback.

**CAUTION:** Some sheet metal edges are sharp. Use protective gloves when manipulating sheet metal parts.

## PREPARATION

- Carefully remove the fireback panels from the box, removing any cardboard, and place the plastic sides up on your work surface. **Remove the plastic film** from all panels.
- Link the side panels by inserting the tabs into the lowest/widest portions of the slits on the back panel, and secure by pulling upward (Fig. 1-3).

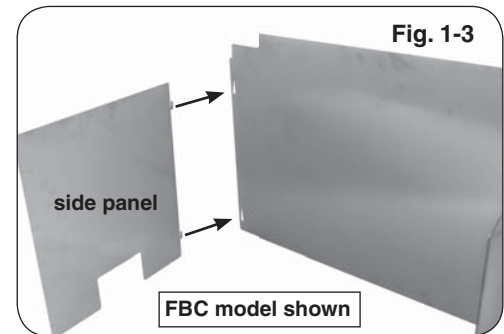

## INSTALLATION

**WARNING:** The fireplace must be off and safely cooled down during installation.

- Place the assembled fireback behind the burner system approximately 2-4" and adjust the side panels as needed to match the contour of your fireplace (see Fig. 1-1). When placed properly sooting should not occur. If sooting does occur adjust the placement.

**CAUTION:** DO NOT allow the fyreback to rest on or touch any gas piping, valves, or electrical control wires during or after installation. Damaging your burner system could release gas, which could cause death, injury, or property damage. The cutouts on either side of the fyreback are provided to safely route gas piping through.

**WARNING:** The fyreback will become very hot during and after fireplace operation. Do not touch the fyreback while the fireplace is lit. Touching hot metal will result in personal injury.

### **CARE AND CLEANING**

THE FYREBACK MUST BE COMPLETELY COOL WHEN CLEANING. DO NOT SPRAY ANY CLEANER OR LIQUIDS ON THE FYREBACK WHEN HOT.

Stainless steel surfaces when exposed to temperatures produced by the burner system will change color. The stainless steel will change color from silver to brown and blue. Clean your fyreback by first using Fire Magic Barbecue and Grill Cleaner (part #3580-1) to remove soot. Always wipe with the grain. Next, use Fire Magic Stainless Steel Cleaner (3581-1) to restore the stainless steel color. Finish by wiping your fyreback down using Fire Magic Polish Wipes (3586-1).

FOR POLISHED MODELS; **ONLY** USE WINDOW CLEANER WITH A SOFT CLOTH.

Clean your fyreback at least once a month.