

## DRC2000 SERIES

### MERIT SERIES DIRECT VENT FIREPLACES















**Superior**<sup>™</sup>  
FIREPLACES  
*Our name is our promise.*

## CONTEMPORARY

The DRC2000 Series offers excellent value without compromising on quality or design. These fireplaces offer an array of standard features, increased performance and state of the art technology to ensure many years of beauty and warmth.

### FEATURES

-  Available in 33", 35", 40" and 45" radiant smooth-faced models
-  Dedicated top or rear flue configuration (45" model is a combo top/rear)
-  Millivolt (Remote-ready) or electronic ignition with battery backup
-  Operates in the event of a power outage
-  Beautiful flame that rises through reflective black crushed glass media
-  Up to 65.5% AFUE
-  Standard tempered glass
-  Fireplace includes standard barrier that meets 2015 requirements
-  Black painted interior
-  Durable textured powder coat finish
-  Optional blower and remote controls available for all models
-  20 year limited warranty


### INTERIOR

(Standard)



Black Painted Interior

## APPLIANCE SPECIFICATIONS

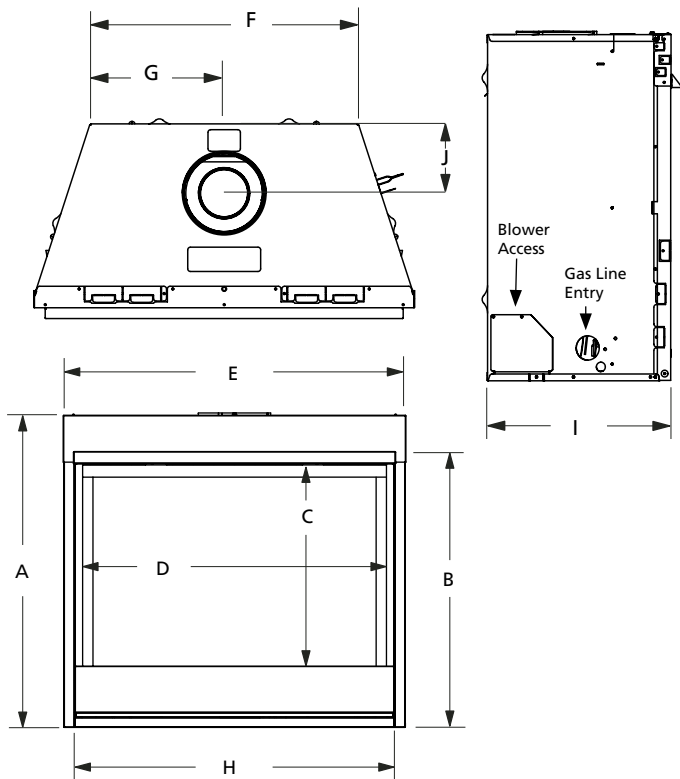

	DRC2033	DRC2035	DRC2040	DRC2045
A	30-1/8"	32-1/8"	37-1/8"	37-1/8"
B	26-1/4"	28-3/4"	33-1/4"	33-1/4"
C	18-5/16"	22-1/4"	25-3/4"	25-3/4"
D	30-1/2"	32-3/8"	37-3/8"	42-3/8"
E	33-5/8"	35-1/4"	40-1/4"	45-1/4"
F	21-7/8"	25"	30"	35"
G	10-15/16"	12-1/2"	15"	17-1/2"
H	31"	32-7/8"	37-7/8"	42-7/8"
I	14"	17"	17"	17"
J	5-3/4"	6-7/8"	6-7/8"	6-7/8"

## FRAMING SPECIFICATIONS

	DRC2033	DRC2035	DRC2040	DRC2045
WIDTH	33-3/4"	35-3/8"	40-3/8"	45-3/8"
HEIGHT	33-1/4"	35-1/4"	40-1/4"	40-1/4"
DEPTH	14-1/2"	18"	18"	18"

### IMPORTANT NOTES:


As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.


Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, specifications, colors and prices are subject to change or discontinuance without notice.

## OPTIONAL ACCESSORIES


### Glass Media




Platinum



Reflective Blue



Goldfinger



Copper

## ADDITIONAL ACCESSORIES

Choice of blower with multiple control options

Remotes & wall mounted controls

**On the Cover:** DRC2035 shown with reflective black glass media and black painted interior

## FIREPLACE EFFICIENCIES

MODEL	FUEL	BTU/HR	AFUE**	P4/ENERGUIDE*
DRC2033	LP	10,000	64%	60.4%/64.8%
DRC2033	NG	12,000	64%	60.4%/64.8%
DRC2035	LP	12,000	65.5%	61%/65%
DRC2035	NG	14,000	65.5%	61%/65%
DRC2040	LP	15,000	65.5%	62%/65%
DRC2040	NG	16,000	65.5%	62%/65%
DRC2045	LP	19,000	65%	63%/66%
DRC2045	NG	20,000	65%	63%/66%

\*Intermittent ignition systems. Millivolt/Electronic.

\*\*Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.



© 2014 Innovative Hearth Products

785495M 07/14

Visit us online



SuperiorFireplaces.us.com

